

ATEM 4 M/E Constellation HD



The massive 4 M/E model doubles the features of the 2 M/E model with 40 x 3G-SDI inputs, 24 x 3G-SDI outputs, 4 DVEs, 16 ATEM Advanced Keyers, 4 multiviews and 2 SuperSource for 12 x DVEs in total.

43 250 kr

Connections

Total Video Inputs

40

Total Video Outputs

24

SDI Rates

1.5G, 3G

Total Audio Inputs

2 x balanced 1/4 inch Jack,
1 x 32 stereo channel BNC MADI in.
1 x 5 pin XLR Talkback.

Total Audio Outputs

2 x balanced 1/4 inch Jack,
2 x 32 stereo channel BNC MADI out.
1 x 5 pin XLR Talkback.

SDI Audio Inputs

8 Ch embedded audio on all
SDI inputs.

SDI Audio Outputs

16 Ch embedded audio on all
SDI outputs.

Timecode Connections

None

Reference Input

Tri-Sync or Black Burst.

Video Input Re-Sync

On all 40 inputs.

Frame Rate and Format Converters

On all 40 inputs.

SDI Aux Outputs

Any of the 24 SDI outputs.

SDI Preview Outputs

Any of the 24 SDI outputs.

SDI Program Outputs

Any of the 24 SDI outputs.

Down Converted SDI

Program Output

None

Webcam Output

1 x USB-C supporting 720p or 1080p
at PGM frame rate.

Total Multi Views

4 x 3G-SDI

Remote

RJ12 supports RS-422

Control Panel Connection

Ethernet. Direct connection between
panel and chassis, or via network.

Internal Timecode Generator

Yes

Talkback

RJ45 for 3rd party talkback systems.

Tally Output


Added via ethernet connection to
Blackmagic Design GPI and Tally
Interface product. (Not included).

Ethernet

Supports 10/100/1000 BASE-T.

Computer Interface

1 x USB-C supports USB 2.0

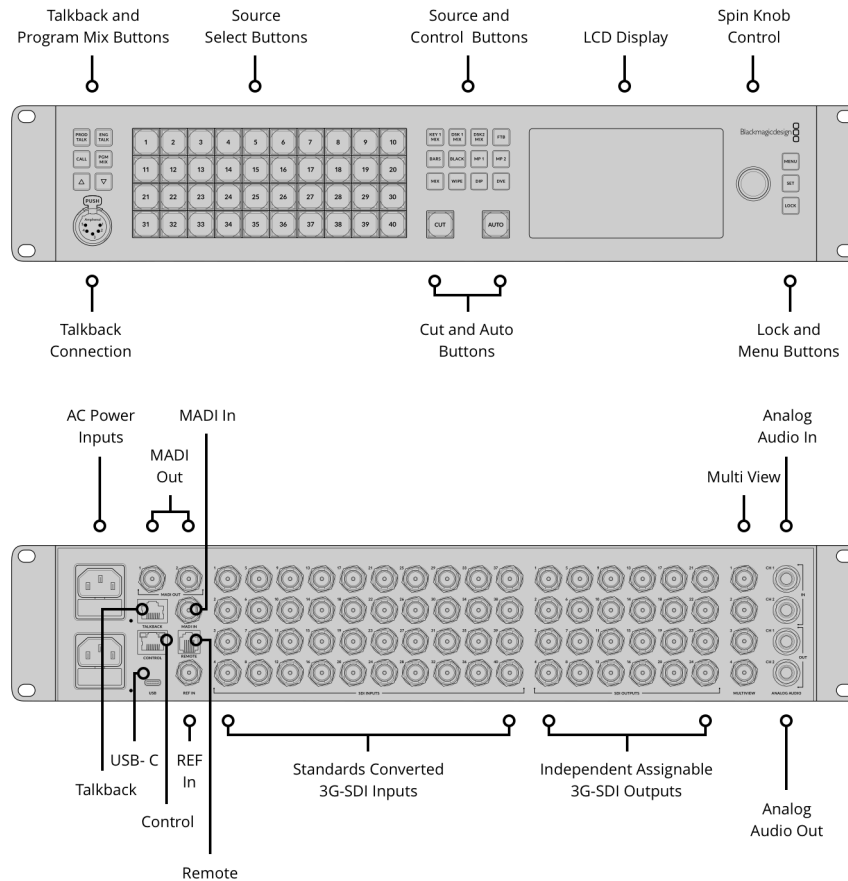

Standards

SD Video Standards

None

HD Video Standards

720p50, 720p59.94, 720p60
1080i50, 1080i59.94, 1080i60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60

SDI Compliance

SMPTE 292M, SMPTE 296M,
SMPTE 424M, SMPTE 425M level A
and B.

Video Sampling

4:2:2

Color Precision

10-bit.

Color Space

REC 709

SDI Auto Switching

Automatically detects between 1.5G-
SDI and level A or level B 3G-SDI.

Product Specifics

Upstream Keyers

16

Downstream Keyers

4

Advanced Chroma Keyers

16

SuperSource

2

Talkback Support

Yes

Mix Minus Support

Yes

Linear/Luma Keyers

21

Transition Keyer (Stinger/DVE)

4 Stinger, 4 DVE.

Total Number of Layers

28

Pattern Generators 21	Control Panel Front fascia emergency switching, software or optional hardware panel.	Tally Red for program and green for preview indication.
Color Generators 2	Routable Windows 64	Windows Source Labels Yes

Multi View Monitoring

Multi View Monitoring 4 x multi views each configurable to 16, 13, 10, 7 or 4 up views. Includes monitoring of Program, Preview, Inputs, Media Players, M/Es, DSKs, SuperSource, Clean Feed with optional labels and audio meters.	Multi View Video Standard HD Display Minimum Resolution 1366 x 768
--	---

Media Player

Media Players 4	Media Pool Clip Capacity 4 x up to 1080p60.	Media Pool Still Image Format PNG, TGA, BMP, GIF, JPEG and TIFF.
Channels Fill and key for each media player.	Media Player Clip Length in 720 HD 1200 frames.	Media Pool Video File Format TGA Sequence.
Media Pool Still Image Capacity 60	Media Player Clip Length in 1080 HD 600 frames.	Media Pool Audio File Format WAV, MP3 and AIFF.

Display

Front panel Built in 5 inch HD LCD monitor for video, 42 LED buttons for setup and emergency switching, 8 source buttons, 4 transition buttons, 6 talkback selection and mix buttons, menu control knob and set button, front panel lock button.
--

Processing

Processing Delay < 10 lines.
--

Audio Mixer 156 Channel mixer Selectable On/Off/Audio-Follow-Video. Level and Peak metering. Master gain control. 6 band parametric EQ, Dynamics including Expander, Gate, Compressor and Limiter.	Down Conversion None
--	--------------------------------

Software

Control Panel Included ATEM Software Control Panel included free for Mac 11.11 Big Sur, Mac 12 Monterey or later and Windows 10 or 11.	Software Updates Using USB or Ethernet connection directly connected to Mac OS or Windows computers. Includes ATEM Setup Utility.	Configuration Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Setup Utility connected via USB to chassis.
--	---	--

Operating Systems



Mac 14.0 Sonoma,
Mac 15.0 Sequoia or later.



Windows 10 and 11.

Power Requirements

Power Supply 2 x Internal 100 - 240 AC.	Power Usage 147W estimated.
---	---------------------------------------

Physical Specifications



Physical Installation

Physical Installation

2 Rack Unit Size.

Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 60° C (-4° to 140° F)	0% to 90% non-condensing

What's Included

- ATEM 4 M/E Constellation HD
- Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer’s Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2025, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes VAT and shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller