

Blackmagic PYXIS Monitor Kit




Blackmagic PYXIS Monitor is a versatile 5" HDR touchscreen monitor with full camera control that can be mounted almost anywhere. Blackmagic PYXIS Monitor Kit contains the monitor, foldable sunshade, locking USB cable and PYXIS Mounts to attach to Blackmagic PYXIS and Blackmagic URSA Cine cameras. The design of the PYXIS Mounts with a dovetail means the PYXIS Monitor can be quickly attached and removed from the camera. The mount makes it simple to position the monitor where customers need it without requiring tools to loosen bolts.

S\$615

Connections

USB-C with Locking Connector

Video, power, data and software updates.

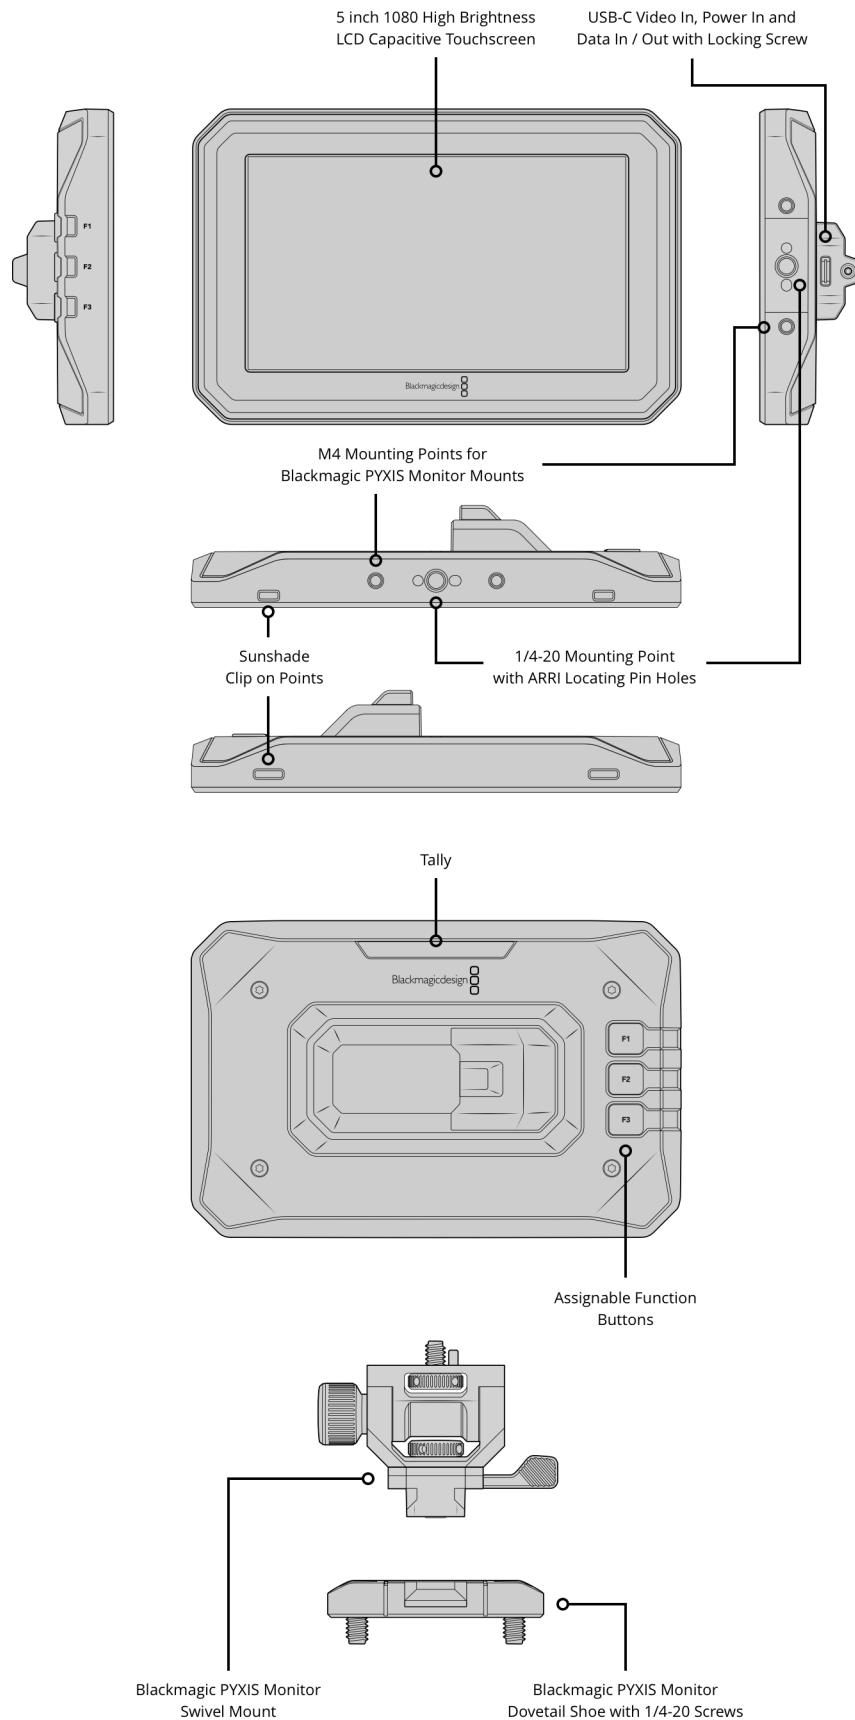

Features

Display Size

5 inch.

Display Resolution

Full 1920 x 1080.

Display Type

LCD capacitive touchscreen.

Display Brightness

1500 nits.

Frame Rates

Up to 60fps.

Tally

Rear facing LED tally light.

Accelerometer

Automatically rotates image when monitor mounted upside down.

Control

On Screen Controls

Tap screen to control Monitor Overlays, Frame Rate, Shutter, Iris, Timecode, ISO, White Balance, Tint, Power, Record Start/Stop, Media, Audio, Focus Zoom, Digital Slate and camera menus.

Button Controls

Includes F1, F2, F3 assignable function buttons to recall preset parameters or toggle functions.

Function Button Presets

FPS: Preset Value
Iris: Preset Value
WB: Preset Value
ISO: Preset Value
Shutter: Preset Value

Function Button Toggle

Clean Feed
Status Text
Display LUT
Frame Guides
Focus Assist
False Color
Zebra
Grid
Safe Area Guide
Off Speed Rec
Focus Zoom
Focus
Record
Auto White Balance
Color Bars
Playback
False Color + Zebra
OIS
Stream
Still

Mounting

Mounting Points

1 x 1/4-20 bottom mounting point with ARRI locating pin pattern.
2 x M4 bottom mounting points.
1 x 1/4-20 side mounting point with ARRI locating pin pattern.
2 x M4 side mounting points.


Mounting Brackets

Blackmagic PYXIS Monitor Swivel Mount - included in Kit.
Blackmagic PYXIS Monitor Fixed Mount - included in Kit.
Blackmagic PYXIS Monitor Dovetail Shoe - included in Kit.

Compatible Cameras

Blackmagic PYXIS 6K
Blackmagic PYXIS 6K PL
Blackmagic PYXIS 6K EF
Blackmagic URSA Cine 12K LF
Blackmagic URSA Cine 17K 65

Operating Systems



Mac 13.0 Ventura,
Mac 14.0 Sonoma or later.



Windows 10 and 11.

Power Requirements

Powered over USB-C.

Physical Specifications



Environmental Specifications

Operating Temperature
0° to 40°C (32° to 104°F)

Storage Temperature
-20° to 60°C (-4° to 140°F)

Relative Humidity
0% to 90% non-condensing

What's Included

Blackmagic PYXIS Monitor
Blackmagic PYXIS Clip On Sunshade
Blackmagic PYXIS Monitor Swivel Mount
Blackmagic PYXIS Monitor Fixed Mount and screws
Blackmagic PYXIS Monitor Dovetail Shoe and screws
1 x USB-C Viewfinder Cable
Welcome wallet with QR code for software download
Blackmagic Design Sticker

Warranty

Product Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2025, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller